

PRODUCT DATASHEET

SIGMA® 501

SIGMA® 501 is a pigment-free, high performance biaxially orientated sheet sealing material containing PTFE and hollow glass microspheres.




This Data Sheet refers to the material as supplied. The information contained herein is given in good faith, but no liability will be accepted by the Company in relation to same.

We reserve the right to change the details given on this Data Sheet as additional information is acquired. Customers requiring the latest version of this Data Sheet should contact our Applications Engineering Department.

The information given and, in particular, any parameters, should be used for guidance purposes only. The Company does not give any warranty that the product will be suitable for the use intended by the customer.

Health & Safety

For further Health and Safety information please see the relevant Material Safety Datasheets or contact Flexitallic UK Ltd.

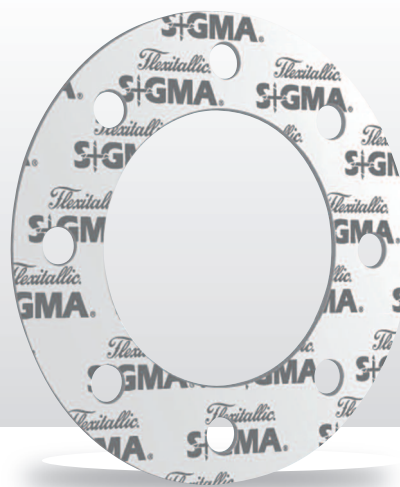

Service:

SIGMA® 501 is capable of creating a seal across a wide range of gasket stress. This makes the product suitable not just for use in standard metallic flanged connections but also in load compromised bolted connections; such as those applications involving glass lined, plastic flanges and thin or distorted metal flanges.

SIGMA® 501 has all the same technical attributes as SIGMA® 500 and is produced pigment-free for use in those processes which cannot tolerate any contamination, however low.

Suitable for sealing most chemicals across the whole pH range (0-14) with the exception of molten alkali metals, fluorine gas, hydrogen fluoride or materials which may generate these.

Recommended temperature range:
- 250°C to 260°C

Recommended pressure range:
Vacuum to 85 bar (1230 psi)

Note:

These temperature and pressure guides cannot necessarily be used simultaneously and may not apply at all thicknesses.

Complies with the requirements of FDA regulations.

Do NOT use gasket pastes.

Availability:

Sheet size:
1.5m x 1.5m
2.0m x 2.0m
For large sizes, welded gaskets are available.

Thickness range:
0.75mm to 3.2mm
Other thicknesses may be available on request.

Colour: White (Pigment free)

Typical Physical Properties:

Thickness	1.5mm	3.0mm
Density	1.4gcm ⁻³	1.4gcm ⁻³
ASTM F36A Compressibility	35%	30%
ASTM F36A Recovery	44%	43%
ASTM F152 Tensile Strength	14MPa	10MPa
DIN 52913 Residual Stress @ 175°C	30MPa	26MPa
DIN 3535-6 Gas Permeability	< 0.1mL/min	< 0.1mL/min
ASTM F37A Liquid Leakage 1000 psi gasket stress, 50 psi Fuel A	0.65mL/hr	0.75mL/hr
ASTM F38B Creep Relaxation	31%	47%