

# Flexitallic®

## SIGMA® 800

SIGMA® 800 is a high quality expanded PTFE sheet sealing material with enhanced low stress sealing characteristics and improved blow-out resistance.




This Data Sheet refers to the material as supplied. The information contained herein is given in good faith, but no liability will be accepted by the Company in relation to same.

We reserve the right to change the details given on this Data Sheet as additional information is acquired. Customers requiring the latest version of this Data Sheet should contact our Applications Engineering Department.

The information given and, in particular, any parameters, should be used for guidance purposes only. The Company does not give any warranty that the product will be suitable for the use intended by the customer.

#### Health & Safety

For further Health and Safety information please see the relevant Material Safety Datasheets or contact Flexitallic UK Ltd.

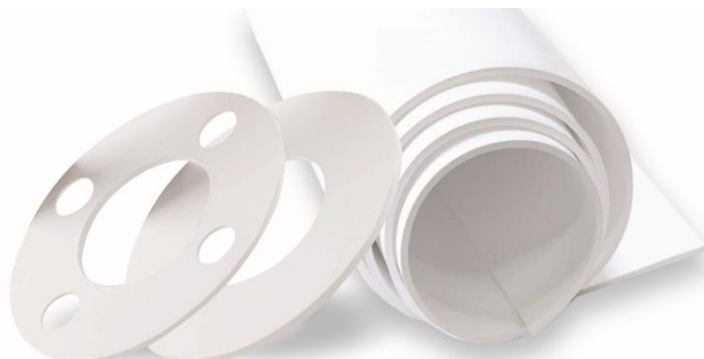

#### Service:

SIGMA® 800 is capable of creating a seal at very low stresses. This makes the product suitable not just for use in standard metallic flanged connections, but also in applications where bolt load may be restricted such as; uneven flanges, applications involving glass lined steel flanges and thin or distorted metal flanges.

Sigma 800 is suitable for sealing most chemicals across the whole pH range (0-14) with the exception of molten alkali metals and fluorine gas.

Sigma® 800 is comprised of 100% pure expanded PTFE. The product does not contain any pigments, inks or adhesives, making it suitable for clean applications.

#### Recommended temperature range:

-240°C to 260°C

#### Recommended pressure range:

Vacuum to 40 bar (580 psi)

#### Note:

#### Typical Physical Properties

Thickness		1.5mm	3.0mm
Density (+/- 10%)	g/cm <sup>3</sup>	0.8	0.8
ASTM F36A Compressibility	%	56%	57%
ASTM F36A Recovery	%	12	15
ASTM F152 Tensile Strength	MPa	22	20
DIN 52913 Residual Stress @ 175°C	MPa	25	20
DIN 3535-6 Gas Permeability	mL/min	0.02	0.02

These temperature and pressure guides cannot necessarily be used simultaneously and may not apply to all thicknesses.

Do NOT use gasket pastes.

Complies with the requirements of FDA regulations.

EC 1935/2004 tested.

TA-LUFT compliant.

#### Availability:

Sheet size:  
1.5m x 1.5m

Thickness range:  
0.5mm to 9mm

**Colour:** White (Pigment free)